



Cloverdale Paint

 Canadian Owned & Operated

PROFESSIONAL FINISHES PRE-CATALYZED EPOXY

- Single Component Convenience
- Excellent Abrasion Resistance
- Multi Surface Adhesion
- Chemical & Stain Resistant
- Interior, Waterborne, Low VOC (<50 g/L)
- No Pot Life

Available in Pearl (77853) and Semi-Gloss (77823)



DURABLE PROTECTION FOR HIGH TRAFFIC AREAS


Storage Tank, Structural Steel, Plant Maintenance, Ornamental Steel, Dry Goods Containers,
Healthcare, Education, OEM, Commercial and Municipal Infrastructure

Pushing The Limits Of Water-Based Technology

HARDNESS DEVELOPMENT

Method: ASTM D4366

Result: 20 - 25; With "Konig Pendulum" oscillations

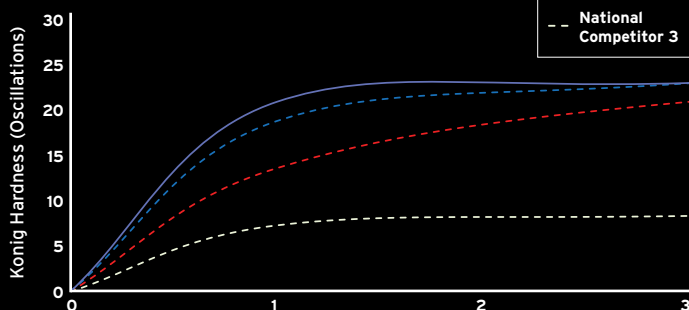


ADHESION TO ALUMINUM SUBSTRATE

Method: ASTM D3359 - Method B

Result: 4B - 5B (Excellent) Depending on Substrate

100% Adhesion for light colors; Darker colors require longer cure time for same level of adhesion

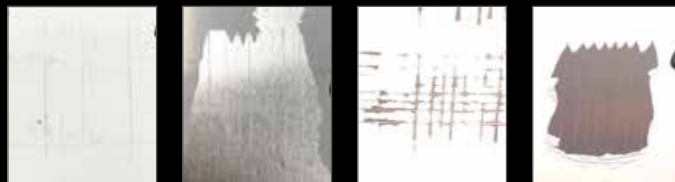

PROTECH

National Competitor 1

National Competitor 2

National Competitor 3

ABRASIVE SCRUB RESISTANCE

Method: ASTM D2486

Result: 800-900 Cycles; With Pumice Scrub Media and Stiff Bristle Brush



PROTECH

National Competitor 1

National Competitor 2

National Competitor 3

BEST IN CLASS ADVANTAGE

Property	Cloverdale Paint	National Comp. 1	National Comp. 2	National Comp. 3
Hardness Development	+++	+	++	
Pencil Hardness	++		+	
Low Temperature (10°C) Application	+			+
Multipurpose Adhesion	+++		++	
Reverse/Direct Impact Resistance	++	++		+
Block Resistance	++		++	
Chemical Resistance	++	+	++	
Stain Resistance	++	+	++	

PROTECH Pre-Catalyzed Epoxy Technical Data

Sheen	Base	Gloss Level	VOC	Volume Solids	Film Thickness		Relative Humidity	Minimum Application Temperature	Maximum Application Temperature	Application and Curing
					Wet	Dry				
Pearl 77853	White Deep Neutral	3	<50 g/L	34% (May vary +/-2% by Base & Color)	4.0 - 6.0 mils	1.4 - 2.2 mils	Not to exceed 85% during application/curing phase	10°C (substrate)	40°C (substrate)	At 21°C + 50% Relative Humidity: • Dry to touch: 1 hr • Dry to re-coat: 4 hrs • Dry hard: 7-14 days (Film thickness will affect dry/cure times)
Semi Gloss 77823	White Deep Neutral	5								

For additional details please see your Cloverdale Paint Representative for the Technical Data Sheet (TDS) for this product.

#SAI0066 01/20



400 -2630 Croydon Drive
Surrey, British Columbia V3Z 6T3
Tel: 604.596.6261
www.cloverdalepaint.com

Proudly Canadian Owned & Operated



Stay Connected with Cloverdale Paint!